


SURFY•INDUSTRIES

**SURFYSPIDER**

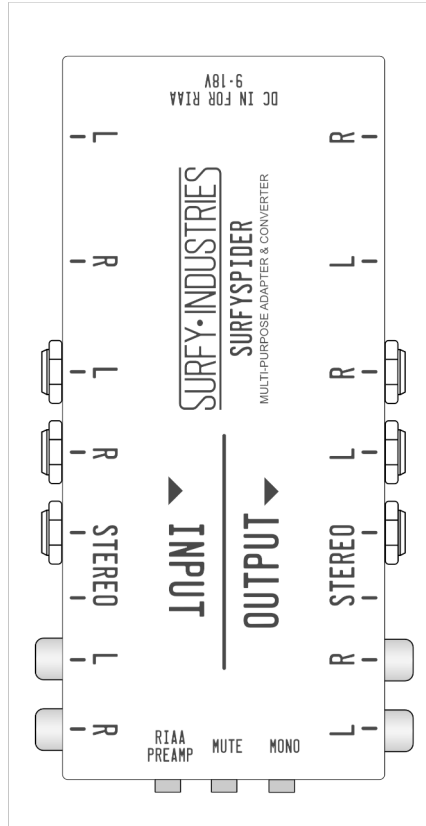


# USER GUIDE

DC IN FOR RIAA	DC input jack, 9-18V DC any polarity
XLR L/R	Inputs and outputs for balanced signals
1/4" L/R	Inputs and outputs for mono signals (TS)
1/4" Stereo	Inputs and outputs for stereo signals (TRS)
1/8" Stereo	Inputs and outputs for stereo signals (TRS)
RCA L/R	Inputs and outputs for mono signals
RIAA PREAMP	Enables the phono preamp for all inputs/outputs Note: a power supply is required
MUTE	Mute switch for all inputs/outputs
MONO	Mono switch for all inputs/outputs

## CONNECTIONS

The unit is completely passive. Whatever signal comes in the INPUT, goes out in the OUTPUT except when using the RIAA-PREAMP. When using the RIAA-PREAMP a power adapter is needed.

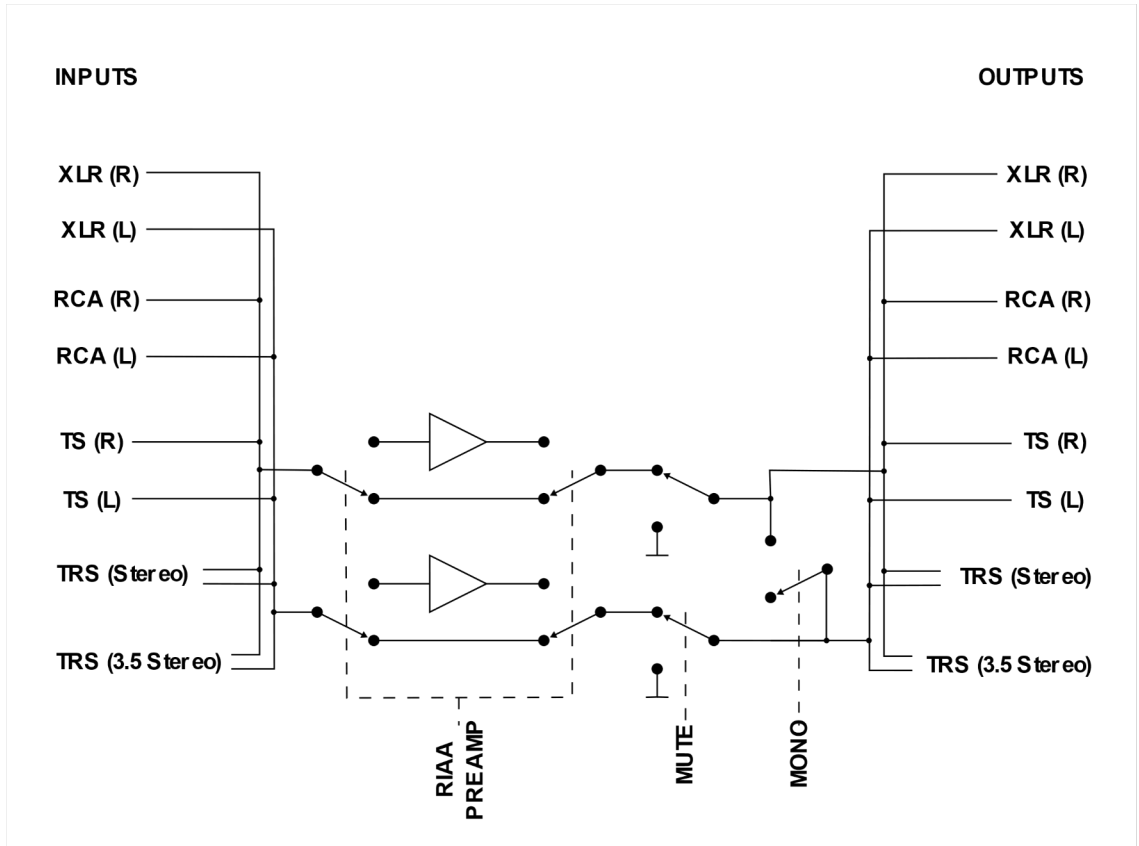

IMPEDANCE	
RIAA Input impedance, any input	47 k $\Omega$
RIAA Output impedance, any output	600 $\Omega$
VOLTAGE AND CURRENT DRAW	
Supply voltage	9-18V DC any polarity
Current draw	20 mA
DIMENSIONS AND WEIGHT	
Dimensions	145 x 65 x 37 mm (5.7 x 2.6 x 1.5 in)
Weight	0.4 kg (12 oz)